

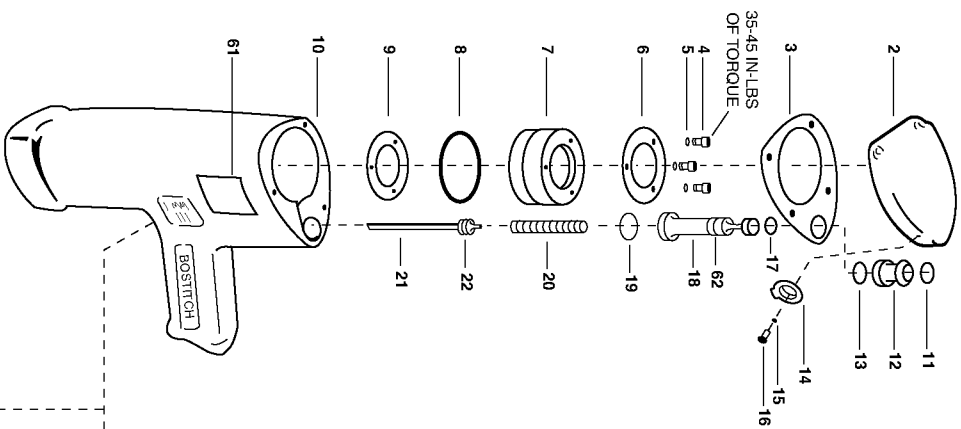


1 — 40-50 IN.-LBS
OF TORQUE



FOR CONTACT TRIP MODELS

FOR TRIGGER OPERATED
MODELS




M11812CNCT

PNEUMATIC TOOLS

CLOUEURS PNEUMATIQUES

HERRAMIENTAS NEUMÁTICAS

160-180 IN.-LBS
26 APPLY MEDIUM STRENGTH
THREAD LOCK

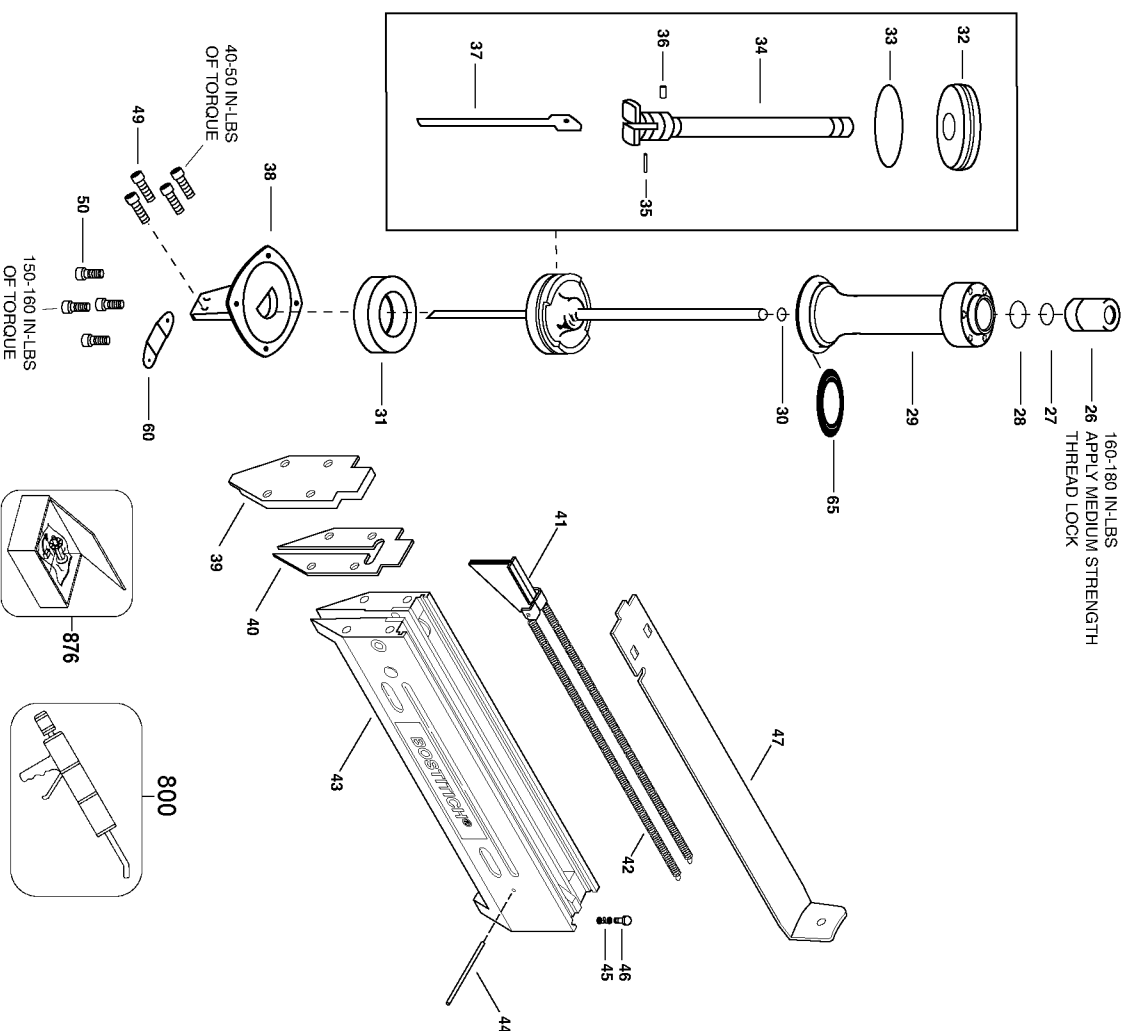

NOTE: When using 3/4" and shorter T-Nails the following components need to be changed out.

- Item#31 (BC711F) needs to be replaced with 105044
 - Item#40 (BC1016) needs to be replaced with BC1360
 - Item#41 (BC392) needs to be replaced with BC1357
- All above replacement components are supplied with the tool.
* Driver damage may occur without proper conversion of above parts.

Parts List for MIII812CNCT Type 0

| Item Number | Part Number | Description | Qty Required |
|-------------|-------------|----------------------|--------------|
| 1 | UA3810.4 | SCREW-10-24 X 5/8 SH | 4 |
| 2 | BC1457 | CAP-MIII | 1 |
| 3 | BC1329 | GASKET | 1 |
| 4 | UA2810 | SCREW-SHCS-8-32X5/8 | 3 |
| 5 | LW8.2 | LOCK WASHER | 3 |
| 6 | BC846 | WASHER-PLATE-POPPET | 1 |
| 7 | BC702 | PISTON-POPPET | 1 |
| 8 | 86460 | O-RING | 1 |
| 9 | 180256 | SEAL | 1 |
| 10 | BC1328A | BODY | 1 |
| 11 | 86314 | O-RING | 1 |
| 12 | BC1331 | VALVE SEAT | 1 |
| 13 | 87251 | O-RING | 1 |
| 14 | BC829 | EXHAUST DEFLECTOR | 1 |
| 15 | SW8 | WASHER-SHAKE PROOF | 1 |
| 16 | UA2804.3 | SCREW-SLBIHS-8-32X1/ | 1 |
| 17 | 88999 | O-RING | 1 |
| 18 | BC1456A | PILOTED VALVE | 1 |
| 19 | 88998 | O-RING | 1 |
| 20 | BC1334 | VALVE SPRING | 1 |
| 21 | 106912 | ASSEMBLY-PILOTING VA | 1 |
| 22 | T34002 | TRIGGER VALVE SEAL | 1 |
| 23 | BC1339 | TRIGGER | 1 |
| 24 | BC1336 | TRIGGER PIVOT PIN | 1 |
| 25 | 86468 | RING | 2 |
| 26 | BC703 | STEM-PLUNGER - MII | 1 |
| 27 | 86458 | O-RING | 1 |

COPYRIGHT© 2005. All Rights Reserved.

Parts list, pricing, and availability subject to change. Please visit www.dewaltservicenet.com for current parts information.

Parts List for MIII812CNCT Type 0

| Item Number | Part Number | Description | Qty Required |
|-------------|-------------|----------------------|--------------|
| 28 | 850144 | O-RING-.614X.070 | 1 |
| 29 | 121800 | POPPET | 1 |
| 30 | 850143 | O-RING-.487X.103 | 1 |
| 31 | 105044 | BUMPER | 1 |
| 31 | BC711F | BUMPER | 1 |
| 32 | BC1175 | DRIVER PISTON | 1 |
| 33 | 850626 | O-RING-1.984X.139 | 1 |
| 34 | BC1455 | PISTON STEM | 1 |
| 35 | UB4112.3 | PIN- DOWEL .250 X .7 | 1 |
| 36 | BC347 | NYLON INSERT | 1 |
| 37 | BC909 | DRIVER | 1 |
| 38 | BC1014 | NOSE-CORNER MII-T5 & | 1 |
| 39 | BC1015 | BLADE GUIDE | 1 |
| 40 | BC1360 | WEAR PLATE | 1 |
| 40 | BC1016 | WEAR PLATE | 1 |
| 41 | BC1357 | T-NAIL PUSHER | 1 |
| 41 | BC392 | T-NAIL PUSHER | 1 |
| 42 | BC1159 | SPRING-EXTENSION | 1 |
| 43 | BC907A | MAGAZINE BODY | 1 |
| 44 | UB2820 | PIN- SPRING .094 X 1 | 1 |
| 45 | BC41 | SPRING-COVER DETENT | 1 |
| 46 | BC34 | MAG.COVER LATCH SHOU | 1 |
| 47 | BC89 | COVER-S3 STAPLE | 1 |
| 49 | UA3816.4 | SCREW-SHCS-10-24X1 | 4 |
| 50 | UA4814.1 | SCREW-SHCS-1/4-20 X | 4 |
| 53 | BC1341 | ROCKER | 1 |
| 54 | BC1338 | ROCKER PIVOT PIN. | 1 |

COPYRIGHT© 2005. All Rights Reserved.

Parts list, pricing, and availability subject to change. Please visit www.dewaltservicenet.com for current parts information.

Parts List for MIII812CNCT Type 0

| Item Number | Part Number | Description | Qty Required |
|-------------|-------------|----------------------|--------------|
| 55 | BC1342 | GUIDE | 1 |
| 56 | UA3808.15 | SCREW-SHCS-8-36X1/2 | 1 |
| 57 | BC1156 | NOSE BRACKET SPRING | 1 |
| 58 | BC1345 | FOOT-CONTACT | 1 |
| 60 | BC1008 | SHIELD-NOSE | 1 |
| 61 | 159919 | LABEL-WARNING-MIIICN | 1 |
| 62 | BC1332 | SEAL-VALVE | 1 |
| 65 | 121799 | O-RING-1.287 X .210 | 1 |
| 800 | 100653 | LUBE (2CC) | 1 |
| 800 | 100679 | LUBE (1LB.CAN) | 1 |
| 876 | ORK6 | REPAIR KIT | 1 |
| 876 | MIIISK | REPAIR KIT | 1 |
| 876 | RBK9 | KIT-REBUILD MIII | 1 |

COPYRIGHT© 2005. All Rights Reserved.

Parts list, pricing, and availability subject to change. Please visit www.dewaltservicenet.com for current parts information.